



FREIOTHERM-ATL-Fast Reactive

WA4951HRU905


Characteristics	<ul style="list-style-type: none"> ■ Anodic electrocoat paint depositable 1K ■ Application, e.g. in the mechanical engineering and plant construction sector ■ Subsequent paste filling, partly neutralised ■ Primer and single coat system 	
Technical / Physical Data	<ul style="list-style-type: none"> ■ Binder-Base Acrylic Resin ■ Colour black Based on the specified colour template (i.e. RAL) ■ Solid Mass DIN EN ISO 3251 53-57 % ■ Density calculated 1,06 g/cm³ ■ MEQ-Base-Value DIN EN ISO 15880 34-39 ■ Viscosity 2000-6000 mPa.s ■ Test layer thickness 12-25 µm 	
Mechanical Test	<ul style="list-style-type: none"> ■ on steel, purified alkaline ■ Cross-cut-test DIN EN ISO 2409 Gt 0 	
Processing and application Dependent on plant and buildings	<ul style="list-style-type: none"> ■ Pretreatment The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue. ■ Gloss value DIN EN ISO 2813 40-60 geometry 60° ■ pH-Value 8,3-8,6 ■ Cunductance 1700-2700 µS/cm ■ Solid Mass DIN EN ISO 3251 17-19 % ■ MEQ-Base-Value DIN EN ISO 15880 55-65 mg/g ■ Organic Solvent Content 0,6-2,0 % ■ Bath Temperature 24-27 °C ■ Coating Time 60-180 seconds ■ Deposition Voltage 100-260 voltage ■ Health & Safety at Work guidelines The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health & Safety at Work and environmental protection can be found in the corresponding safety data sheet. 	
Curing	<ul style="list-style-type: none"> ■ Object temperature Recommended baking temperature 30 Min./120 °C <p>green cross-hatching = baking conditions with good final properties</p>	

Our technical data sheets are to provide you with advice based on our latest state of knowledge. This guidance does not release you from your own obligation to test our products for their suitability for your intended purposes and applications. The sale of our products is in accordance with our terms of business and delivery.



FREIOTHERM-ATL-Fast Reactive

WA4951HRU905

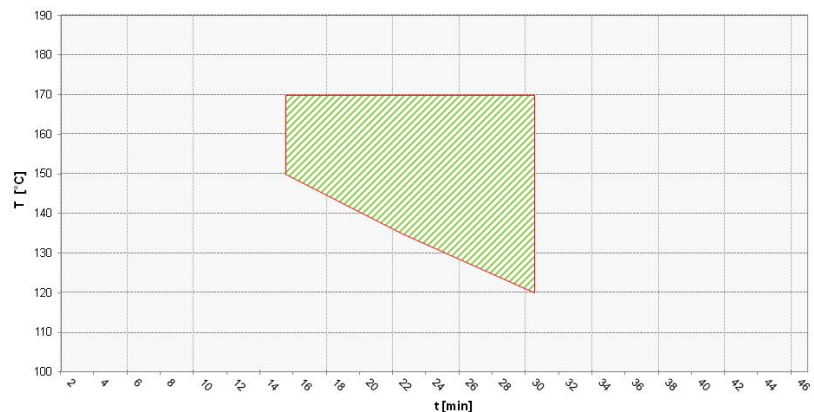

Resistance to storage

- One Turn-Over per year

Approx. 12 month in original packagings at an ambient temperature of 5 to 25 °C. Protect from frost. Open packages are to be used within a short time.

The minimum storage stability of each batch is stated on the product label. The material does not necessarily become unusable if stored for longer than this period. However, for quality assurance purposes, an inspection of these materials is essential to ensure that they are still suitable for the intended application.

Specific comments

- **Test conditions**

All information is based on a standard climate 23/50 DIN EN 23270.

All information is based on our product knowledge and experience. We have no direct influence on the application itself. Please do not hesitate to contact us for further information.

The information provided here contains reference values and does not constitute a specification.