




FREIOTHERM-KTL-Special **WK4995HRU905**

Characteristics	<ul style="list-style-type: none"> ■ Cathodic electrocoat paint depositable 1K ■ Application, e.g. in the job coater sector ■ Pigment paste, fully neutralised ■ Primer ■ Good corrosion protection 										
Technical / Physical Data	<table> <tr> <td>■ Binder-Base</td><td>Epoxy Resin, modified</td></tr> <tr> <td>■ Colour</td><td>black Based on the specified colour template (i.e. RAL)</td></tr> <tr> <td>■ Solid Mass DIN EN ISO 3251</td><td>55-59 %</td></tr> <tr> <td>■ Density calculated</td><td>1,13 g/cm³</td></tr> <tr> <td>■ Test layer thickness</td><td>20 µm</td></tr> </table>	■ Binder-Base	Epoxy Resin, modified	■ Colour	black Based on the specified colour template (i.e. RAL)	■ Solid Mass DIN EN ISO 3251	55-59 %	■ Density calculated	1,13 g/cm ³	■ Test layer thickness	20 µm
■ Binder-Base	Epoxy Resin, modified										
■ Colour	black Based on the specified colour template (i.e. RAL)										
■ Solid Mass DIN EN ISO 3251	55-59 %										
■ Density calculated	1,13 g/cm ³										
■ Test layer thickness	20 µm										
Mechanical Test	<table> <tr> <td>■ on zinc phosphate</td><td></td></tr> <tr> <td>■ Cross-cut-test DIN EN ISO 2409</td><td>Gt 0</td></tr> <tr> <td>■ Erichsen index DIN EN ISO 1520</td><td>2,5 mm</td></tr> </table>	■ on zinc phosphate		■ Cross-cut-test DIN EN ISO 2409	Gt 0	■ Erichsen index DIN EN ISO 1520	2,5 mm				
■ on zinc phosphate											
■ Cross-cut-test DIN EN ISO 2409	Gt 0										
■ Erichsen index DIN EN ISO 1520	2,5 mm										
Resistance Test	<table> <tr> <td>■ on zinc phosphate</td><td></td></tr> <tr> <td>■ Condensate constant climate DIN EN ISO 6270-2 (CH)</td><td>504 hours water ingress Wb <0,5 mm DIN EN ISO 4628-8</td></tr> <tr> <td>■ Salt spray test (NSS) DIN EN ISO 9227</td><td>504 hours water ingress Wb <2 mm DIN EN ISO 4628-8</td></tr> </table>	■ on zinc phosphate		■ Condensate constant climate DIN EN ISO 6270-2 (CH)	504 hours water ingress Wb <0,5 mm DIN EN ISO 4628-8	■ Salt spray test (NSS) DIN EN ISO 9227	504 hours water ingress Wb <2 mm DIN EN ISO 4628-8				
■ on zinc phosphate											
■ Condensate constant climate DIN EN ISO 6270-2 (CH)	504 hours water ingress Wb <0,5 mm DIN EN ISO 4628-8										
■ Salt spray test (NSS) DIN EN ISO 9227	504 hours water ingress Wb <2 mm DIN EN ISO 4628-8										
Processing and application Dependent on plant and buildings	<table> <tr> <td>■ Pretreatment</td><td>The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue. For more demanding requirements on corrosion inhibiting properties, we recommend suitable conversion processes (e.g. phosphatizing).</td></tr> <tr> <td>■ Gloss value DIN EN ISO 2813</td><td>40-60 geometry 60°</td></tr> <tr> <td>■ pH-Value</td><td>4,6-4,9</td></tr> <tr> <td>■ Health & Safety at Work guidelines</td><td>The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health & Safety at Work and environmental protection can be found in the corresponding safety data sheet.</td></tr> </table>	■ Pretreatment	The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue. For more demanding requirements on corrosion inhibiting properties, we recommend suitable conversion processes (e.g. phosphatizing).	■ Gloss value DIN EN ISO 2813	40-60 geometry 60°	■ pH-Value	4,6-4,9	■ Health & Safety at Work guidelines	The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health & Safety at Work and environmental protection can be found in the corresponding safety data sheet.		
■ Pretreatment	The substrate must be free of adhesion-impairing substances such as oil, grease, rust, scale, rolling skin, wax and separating agent residue. For more demanding requirements on corrosion inhibiting properties, we recommend suitable conversion processes (e.g. phosphatizing).										
■ Gloss value DIN EN ISO 2813	40-60 geometry 60°										
■ pH-Value	4,6-4,9										
■ Health & Safety at Work guidelines	The standard personal safety precautions must be observed when handling painting materials. Detailed information about dangerous goods, safety data and recommendations concerning Health & Safety at Work and environmental protection can be found in the corresponding safety data sheet.										
Curing	<table> <tr> <td>■ Object temperature</td><td>Recommended baking temperature 20 Min./195 °C</td></tr> <tr> <td></td><td>green cross-hatching = baking conditions with good final properties</td></tr> </table>	■ Object temperature	Recommended baking temperature 20 Min./195 °C		green cross-hatching = baking conditions with good final properties						
■ Object temperature	Recommended baking temperature 20 Min./195 °C										
	green cross-hatching = baking conditions with good final properties										



FREIOTHERM-KTL-Special

WK4995HRU905

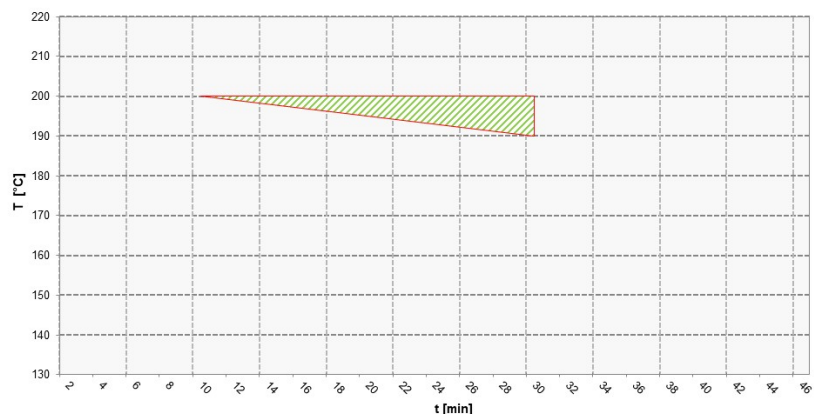

Resistance to storage

- One Turn-Over per year

Approx. 12 month in original packagings at an ambient temperature of 5 to 25 °C. Protect from frost. Open packages are to be used within a short time.

The minimum storage stability of each batch is stated on the product label. The material does not necessarily become unusable if stored for longer than this period. However, for quality assurance purposes, an inspection of these materials is essential to ensure that they are still suitable for the intended application.

Specific comments

- **Test conditions**

All information is based on a standard climate 23/50 DIN EN 23270.

All information is based on our product knowledge and experience. We have no direct influence on the application itself. Please do not hesitate to contact us for further information.

The information provided here contains reference values and does not constitute a specification.